

06-08-00

A

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.

NORT0051 (11925DMUS01U)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

ANDREW J. PROKOP

of: METHOD AND APPARATUS FOR CALL PROCESSING

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL542038195US
- ☒ FOUR sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☒ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Postcard, Recordation Sheet, Assignment, Check \$40.00, Form PTO-1449, Reference

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	36	- 20 =	16	x \$18.00	\$288.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
TOTAL FILING FEE					\$1,212.00

- ☒ A check in the amount of \$1,212.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 20-1504 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: JUNE 7, 2000


 Signature

DAN C. HU
 REGISTRATION NO. 40,025
 TROP, PRUNER & HU, P.C.
 8554 KATY FREEWAY, SUITE 100
 HOUSTON, TEXAS 77024
 PHONE: (713) 468-8880
 FAX: (713) 468-8883

CC:

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: METHOD AND APPARATUS FOR CALL
PROCESSING

APPLICANT: ANDREW J. PROKOP

Express Mail No.: EL542038195US
Date: JUNE 7, 2000

Prepared by: Trop, Pruner & Hu, P.C.
8554 Katy Freeway, Ste. 100, Houston, TX 77024
713/468-8880 [Office], 713/468-8883 [Fax]

METHOD AND APPARATUS FOR CALL PROCESSING

BACKGROUND

The invention relates to a method and apparatus for call processing.

Packet-based data networks are widely used to link various types of network elements, such as personal computers, servers, gateways, network telephones, and so forth. Data networks may include private networks (such as local area networks or wide area networks) and public networks (such as the Internet). Popular forms of communications between network elements across packet-based data networks include electronic mail, file transfer, web browsing, and other exchanges of digital data.

With the increased capacity and reliability of packet-based data networks, voice communications (including telephone calls, video conferencing, and so forth) over data networks have become possible. Voice communications over data networks are unlike voice communications in a conventional public switched telephone network (PSTN), which provides users with dedicated, end-to-end circuit connections for the duration of each call. Communications over data networks, such as IP (Internet Protocol) networks, are performed using packets or datagrams that are sent in bursts from a source to one or more destination nodes. Voice data sent over a data network typically shares network bandwidth with conventional non-voice data (e.g., data associated with electronic mail, file transfer, web access, and other traffic).

Various standards have been proposed for voice and multimedia communications over data networks. One such standard is the H.323 Recommendation from the International Telecommunications Union (ITU), which describes terminals, equipment, and services for multimedia communications over data networks. Another standard for voice and multimedia communications is the Session Initiation Protocol (SIP), which establishes, maintains, and terminates multimedia sessions over a data network. SIP is part of multimedia data and control architecture developed by the Internet Engineering Task Force (IETF). The IETF multimedia data and control architecture also includes other protocols to enable voice and multimedia sessions over data networks.

To establish a call, an originator device sends a call request to a destination device, with the call request containing an identifier of the destination device. The

identifier may be a telephone number, a SIP address, or some other identifier. In a network having multiple network elements capable of participating in a voice or multimedia session, each network element is typically assigned a unique identifier. In a SIP network, one or more SIP proxies may be used to resolve locations of devices associated with a logical identifier. Thus, for example, a call request containing a telephone number may be processed by the SIP proxy, with the telephone number resolved to the physical location of the destination device.

Although improved technology has enhanced the flexibility in how a call session is established, some limitations still exist. For example, in a conventional network, convenient mechanisms have not been provided to enable a group of network elements to be associated with a single or a reduced number of logical identifiers for call sessions over packet-based networks. A need thus exists for a method and apparatus to enable more flexible techniques and mechanisms for call processing over packet-based data networks.

SUMMARY

In general, according to one embodiment, a method of providing call processing in a communications system having a packet-based network comprises receiving a first call request from a first device and sending a response to the first call request to indicate an attempt to establish a call session. One of plural destination devices to contact is identified in response to the first call request, and a second call request is sent to the one destination device.

In general, according to another embodiment, a system capable of participating in call sessions over a packet-based network includes a first module adapted to process a first call request from a first device in a server mode and a second module adapted to send a second call request to a second device in a client mode in response to the first call request. Further, a third module is adapted to process at least one message from one of the first and second devices in a proxy mode.

Some embodiments of the invention may have one or more of the following advantages. Increased capabilities are provided for management of inbound calls targeted to a community of network entities. Decisions may be made on which of plural entities are accessed in response to a given inbound call or in response to input data received during a call. In one example application, a single or a small number of

telephone numbers may be presented to the outside world while, within the community, multiple parties (greater than the number of telephone numbers presented to the outside world) are present that can take the inbound call. By combining tasks performed by various logical entities (e.g., client, server, proxy) for call processing in a packet-based network, flexibility may be enhanced.

Other features and advantages will become apparent from the following description, from the drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an embodiment of a communications system including a packet-based network.

Fig. 2 is a block diagram of components of a call processing control (CPC) system in accordance with an embodiment usable in the communications system of Fig. 1, the CPC system providing combined server, client, and proxy modules.

Fig. 3 is a message flow diagram of various states of a call session involving a user system and the CPC system in accordance with an embodiment.

Fig. 4 is a state diagram of processing performed in the CPC system of Fig. 2.

DETAILED DESCRIPTION

In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible. For example, although reference is made to a Session Initiation Protocol (SIP) in the described embodiments, other embodiments may include other protocols for real-time interactive call sessions.

Referring to Fig. 1, a communications system 10 includes a packet-based data network 12 and various network elements. The network elements may include a user system 16 and proxies 14 and 18, as well as various network elements in a community 26. As used here, a "community" may refer to any collection or group of systems or devices that may be grouped together. For example, the community 26 may include an enterprise, such as a corporation or other organization.

The community 26 contains a call processing control (CPC) system 20 in accordance with an embodiment that includes combined logical entities. Such logical

entities may include a client task, a server task, and a proxy task. Under control of the client, server, and proxy tasks, the CPC system 20 is capable of processing inbound calls over the data network 12 and routing the calls to appropriate ones of various network elements (in the community 26) that may be coupled to a local network 32, which may be a packet-based network. As examples, the network elements include an IVR (integrated voice response) system 22 to provide integrated voice services, an announcement system 24, and various systems 28, 30 associated with plural agents. Agents may be persons associated with a customer service department, technical support personnel, and so forth, as examples. Other network elements may also be connected to the local network 32.

One capability provided by the CPC system 20 is the ability to present one or a relatively small number of telephone numbers or other identifiers to the outside world (outside the community 26). A call originated from an outside network element and directed to a telephone number or address associated with the community 26 is processed by the CPC system 20. The CPC system 20 accepts the call and determines, based on information in the call request or further input or information from the calling entity, which of the network elements in the community 26 is to be involved in the call session. In effect, the CPC system 20 is able to perform one-to-many address or identifier translation of an address or identifier contained in an inbound call request. In addition, in an established same call session, the CPC system 20 can direct a call from a first device in the community 26 to another device in the community.

Any one of the network elements in the community 26 may place an outgoing call through the CPC system 20. A called party on the outside world may receive an indication that the originator is the community 26 rather than one of the individual agents 28, 30. The CPC system 20 thus provides a combination of tasks: a server to accept a call from a client; a proxy to process a call on behalf of another network element; and a client to initiate a call to a destination device inside or outside the community 26.

As used here, a "call session" refers generally to either an audio (e.g., voice), a video, or a multimedia session established between two or more network elements (and parties using those elements) coupled to the data network 12 (or any other data network). A call session may also be a text-based chat session, such as an instant messaging session. As used here, an "interactive" call session refers to a call session

in which two or more parties are involved in an exchange of voice and/or video data (or text data) in an established session between two or more network elements. A "real-time" interactive call session refers to an exchange of data, such as audio and/or video data (or text data), on a substantially real-time basis between two terminals. A session is substantially real time if interaction is occurring between two end points or parties, with a communication from one end point followed relatively quickly by a response or another communication from the other end point, typically within seconds, for example. A "call request" is a message (inbound or outbound) generated to establish a call session.

Interactive call sessions are contrasted with electronic mail messaging, for example, in which a first participant sends a message over a data network to a second participant. No indication is usually provided back to the first participant that the second participant has received the message or that the second participant is even at his or her terminal. In contrast, an interactive session involves a request followed by some acknowledgment that a called party has accepted the call request. This enables the interactive session in which participants exchange data (e.g., voice, video, and/or text).

As used here, a "data network" or "network" may refer to one or more communications networks, channels, links or paths, and systems or devices (such as routers) used to route data over such networks, channels, links, or paths. Packet-based data networks communicate with packets, datagrams, or other units of data over the data networks. Unlike circuit-switched networks, which provide a dedicated end-to-end connection or physical path for the duration of a call session, a packet-based network is one in which the same path may be shared by several network elements.

A packet-based network may be a packet-switched network, such as an Internet Protocol (IP) network, which is based on a connectionless internetwork layer. Packets or other units of data transmitted into a packet-switched data network may travel independently over any path (and possibly over different paths) to a destination point. The packets may even arrive out of order. Routing of the packets is based on one or more addresses carried in each packet.

One version of IP is described in the Request for Comments RFC 791, entitled "Internet Protocol," dated September 1981. Other versions of IP, such as IPv6, or other connectionless packet-switched standards may also be utilized in further

embodiments. A version of IPv6 is described in RFC 2460, entitled "Internet Protocol, Version 6 (IPv6) Specification," dated December 1998.

Packet-based networks may also be connection-oriented networks, such as Asynchronous Transfer Mode (ATM) or Frame Relay networks. In a connection-oriented packet-based network, a virtual circuit or connection is established between two end points. In such connection-oriented networks, packets are received in the same order in which they were transmitted.

One protocol that provides for establishment of streaming communications includes a Session Initiation Protocol (SIP). SIP is part of the multimedia data and control architecture from the Internet Engineering Task Force (IETF). A version of SIP is described in RFC 2543, entitled "SIP: Session Initiation Protocol," dated 1999. SIP may be used to initiate call sessions as well to invite members to a session that may have been advertised by some other mechanism, such as electronic mail, newsgroups, web pages, and other mechanisms. The other protocols in the IETF multimedia and control architecture include the Resource Reservation Protocol (RSVP), as described in RFC 2205, for reserving network resources; the Real-Time Transport Protocol (RTP), as described in RFC 1889, for transporting real-time data and providing quality of service (QoS) feedback; the Real-Time Streaming Protocol (RTSP), as described in RFC 2326, for controlling delivery of streaming media; the Session Description Protocol (SDP), as described in RFC 2327; and the Session Announcement Protocol (SAP), for advertising multimedia sessions.

Other standards may be employed in further embodiments for controlling call sessions over the data network 12. Such other standards may be any other standard that provides for interactive, real-time streaming communications over the data network 12. One alternate standard is the H.323 Recommendation from the International Telecommunication Union (ITU).

In accordance with SIP, the various elements may be SIP clients, SIP servers, or SIP proxies. In the case of one embodiment of the CPC system 20, an entity having a combination of a SIP client, SIP server and SIP proxy may be provided. A SIP client system includes a client application program that is capable of sending SIP requests to perform call requests. A SIP server system includes a server application program that accepts SIP requests to serve as calls and to send back responses to SIP requests. Any user or subscriber system may be a SIP client system when making calls and a SIP server system when receiving calls. A SIP proxy system includes an

intermediary program that acts as both a server and a client for making requests on behalf of other clients.

Thus, in the example of Fig. 1, the user system 16 and any one of the agent systems 28, 30 may be SIP client or SIP server systems. When establishing a call, a SIP client system may establish a call directly over the data network 12 with a server or destination system. Alternatively, the SIP client system may establish the call through one or more SIP proxies.

A call session over the data network 12 may also involve a terminal coupled to a traditional circuit-switched network, such as a public switched telephone network (PSTN) 42. The PSTN-connected device may be a standard telephone 44. Circuit-switched signaling and traffic are translated to packet-based signaling and traffic by a PSTN gateway 40. Thus, a user at the telephone 44 may dial the one or more telephone numbers associated with the community 26 to reach the CPC system 20. Similarly, any one of the network elements in the communications system 10 may direct a call targeted to the telephone 44.

Referring to Fig. 2, the components of the CPC system 20 in accordance with one embodiment are illustrated. The CPC system 20 includes a call processing module 100 that may include several elements, including a proxy module 102, a user agent client (UAC) module 104, and a user agent server (UAS) module 106. Although indicated as sub-modules within a general module, the proxy, UAC and UAS may actually be separate modules in the CPC system 20 in a further embodiment.

As used here, the client, server, and proxy modules may also be referred to as tasks. In addition, the CPC system 20 can be said to be operating in one of client, server, or proxy modes depending on which of the client, server, or proxy modules or tasks have control.

The call processing module 100 may also include a call state script 108 that determines what the call processing module 100 should do next in the establishment, management, or termination of a call session. In one embodiment, the call state script 108 may be implemented as an Extensible Markup Language (XML™) script. One version of XML™ is described in "Extensible Markup Language (XML™) 1.0," Worldwide Web Consortium (W3C) Recommendation, dated February 1998. XML™ allows one to define a customized markup language for many classes of documents.

XML™ may be used to encode may different types of information, including the script modules as described herein for creating telephony services in accordance with some embodiments.

The CPC system 20 includes a network interface, which may be in the form of a network interface card or controller, coupled to the data network 12 and local network 32. Above the network interface 114 are device drivers and transport and network layers 112. The transport and network layers 112 may include a TCP/IP stack and/or a UDP/IP stack. TCP is described in RFC 793, entitled "Transmission Control Protocol," dated September 1981; and UDP is described in RFC 768, entitled, "User Datagram Protocol," dated August 1980. TCP and UDP are transport layers for managing connections between network elements over an IP network. For processing of SIP control messages, a SIP stack 110 is provided. The SIP stack 110 is basically a state machine to parse SIP messages.

The various software routines or modules in the CPC system 20 may be executable on one or more control units 118. Instructions of such software routines or modules may be stored in one or more storage devices 120 and loaded for execution on the one or more control units 118.

One example use of the CPC system 20 is in a call center, which may be the technical support department or customer service department of a company that has many agents answering calls. In the call center example, the community 26 is the call center. The call center may present a single or small number of telephone numbers or other call identifiers to the outside world. A customer calls one of these numbers or identifiers and is given some ringback indication or an announcement. The call center software, which may be the call processing module 100 of the CPC system 20, may connect the caller to a variety of destinations. For instance, a caller might be first connected to the IVR system 22 (Fig. 1) to collect input data from the customer. The collected data is then used to determine which agents may be able to meet the customer's needs. While an available agent is being chosen, the customer may be connected to a voice announcement system that informs the customer that he or she is being connected to an agent and an approximate wait time. When ready, the CPC system 20 connects the customer to an agent (28, 30). While the customer is speaking to the agent, the CPC system 20 may monitor the call.

When a call request is received by the CPC system 20, the CPC system 20 acts as if it is the end point of the call (providing the services of a UAS). Based on information contained in the call request or received from the calling entity, the CPC system 20 can establish a session with a selected entity in the community 26 (acting as a UAC in this capacity). The CPC system 20 is also able to route messages to an appropriate destination (which is the role of a SIP proxy). The CPC system 20 is a participant in both calls involved in a call session—the call from the caller to the CPC system 20 and the call from the CPC system 22 to a call center end point (a network element in the community 26). The CPC system 20 acts as a “stateful” proxy; that is, the CPC system 20 is involved in all calls from inception to release. However, although the control path is through the CPC 20, the media path may be between the appropriate one of the network elements in the community 26 and the caller.

Referring to Fig. 3, a message flow of an example call session is illustrated. A user system, which may be the user system 16, or the PSTN gateway 40 acting on behalf of a circuit-switched connected telephone, may send a SIP Invite request (at 202) to the CPC system 20. The SIP Invite request is a call request to invite a remote network element to a desired call session. The Invite request sent at 202 contains a callee identifier Y, which may be in one of numerous forms, such as a telephone number, a SIP address, or any other logical identifier. The identifier Y is an identifier associated with the community 26. The Invite request also contains an origination address X associated with the calling user system.

The CPC system 20 may return a Trying response (at 204), followed by a 183 In-Band Ringing response (at 206). The In-Band Ringing response indicates that the destination has been found and the receiving network element is attempting to reach the called party. In-Band Ringing allows the CPC system 20 to provide media to the caller, such as a ringback, a recorded announcement, and so forth prior to answering the call. As an alternative, instead of a 183 In-Band Ringing response, a 180 Ringing response may be sent by the CPC system 20. When the initiating user system receives the 183 Ringing message, it generates locally a ring indication.

By directly acknowledging the Invite request with the Trying and In-Band Ringing responses sent at 204 and 206, the CPC system 10 acts as a SIP server. Thus, generation and communication of the Trying and In-Band responses are controlled by the UAS 106 in the CPC system 20.

Next, in its client mode, the CPC system 20 (under control of the UAC 104) then sends an Invite request (at 208) to the IVR system. The Invite request sent at 208 includes an origination address X associated with the user system 16, a destination address I associated with the IVR system 22 (Fig. 1), and a via address S corresponding to the address of the CPC system 20. Upon receipt of the Invite request, the IVR system 22 returns a Trying response (at 210) followed by a 183 In-Band Ringing response (at 212). The Trying and Ringing responses are absorbed by the UAC 104. Once it has accepted the call, the IVR system 22 sends an OK response (at 214) to the UAC 104 in the call processing module 100. In response, under control of the proxy 102 in the call processing module 100, an OK response is sent (at 216) back to the user system 16 to indicate that the Invite request (sent at 202) has been accepted.

The OK response sent by the IVR system 22 contains a message body (in SDP format) that describes the capabilities of the IVR system 22. The message body is included in the OK response sent (at 216) to the user system 16. In response, the user system 16 sends an Ack request (at 218) back to the UAS 106 in the CPC system. The proxy 102 in the CPC system 20 forwards the Ack request (at 220) to the IVR system 22. At this point, a call has been established (at 222) between the user system 16 and the IVR system. The media path for the call 222 is between the user system and IVR system directly (without passing through the CPC system 20).

During the IVR call 222, the IVR system 22 may prompt the user to input requested information. The IVR system 22 can collect voice data, DTMF (dual tone multi-frequency) signals, or other types of input data. At the conclusion of the IVR call, after the IVR system has collected the desired user information (e.g., user name, account information, and so forth), the IVR call 222 may be released. This is accomplished by the transmission of a Bye request (at 224) from the IVR system 22 to the CPC system 20. The CPC system 20 returns an OK response (at 226) to indicate that the Bye request has been successfully processed. The IVR call 222 at this point has terminated. However, the call session involving the calling user system and the community 26 is not released. Instead, the CPC system 20 will attempt to establish another call in the call session between the user system and another entity in the community 26.

The CPC system 20 may then send (at 228) an Invite request to an appropriate agent system based on the collected customer information. For example, the customer

may have bought a certain type of product which is handled by a predetermined department. The origination address in the Invite request at 228 is the address X of the user system 16, the destination address A corresponds to the agent system, and the via field is the address S corresponding to the CPC system 20 acting in its proxy capacity. Upon receipt of the Invite request, the agent system returns a Trying response (at 230) followed by a 183 In-Band Ringing response (at 232). While the CPC system 20 is re-connecting the call, it may play some pre-recorded message.

To re-connect the call session from the IVR system 22 to the agent system, the CPC system 20 sends an Invite request (at 234) to the user system 16 to redirect the media path to be between the user system 16 and the agent system (instead of the IVR system 22). The Invite request includes a message body that contains information describing the agent system. To indicate that this is part of the same call session with the call user system, the Invite request includes the same call ID with a higher call sequence number. The user system 16 returns an OK response (at 236) when it accepts the Invite request sent at 234. In response, the CPC system 20 sends an Ack request to the user system.

The agent system sends an OK response (at 240) back to the CPC system 20 to accept the Invite request sent at 228. A reliable response message scheme may be used to insure that the OK response sent at 240 is after the re-invite sequence performed at 234, 236 and 238. One example of a reliable response message scheme is described in IETF Internet Draft, entitled "Reliability of Provisional Responses in SIP," dated May 1999. Upon receipt of the OK response at 240, the CPC system 20 returns an Ack request (at 241) to establish a call (at 242) between the user system and the agent system.

To terminate the call, the agent system may send a Bye request (at 244) back to the CPC system 20. The CPC system 20, in its proxy capacity, then sends the Bye request (at 246) to the user system. The user system returns an OK response (at 248), with the CPC system 20 forwarding an OK response (at 250) to the agent system to acknowledge the Bye request sent at 246.

Referring to Fig. 4, a state diagram represents processing of various messages performed by the call processing module 100 (Fig. 2). The state diagram of Fig. 4 tracks events occurring in the message flow diagram of Fig. 3. The UAS 106 in the call processing module 100 waits (at 300) for receipt of an incoming call request from

a user system. When an Invite request is received, the UAS 106 generates (at 302) response messages to send back to the calling user system (204 and 206 in Fig. 3).

Next, the UAC 104 in the call processing module 100 generates (at 304) an Invite request to send to the IVR system 22 (208 in Fig. 3). The UAC 104 then processes (at 306) response messages received from the IVR system 22 (210 and 212 in Fig. 3). Upon receipt of an OK response (214 in Fig. 3) from the IVR system 22, the proxy 102 in the call processing module 100 generates an OK response (at 308) to send to the user system (216 in Fig. 3). When an Ack request is received (sent at 218 in Fig. 3), the proxy 102 generates an Ack request (at 310) to send to the IVR system 22 (220 in Fig. 3). At this point, a call has been established (at 312), with the media path set up between the user system and the IVR system 22.

When the call with the IVR system 22 is terminated by a Bye request from the IVR system 22, the UAS 106 generates (at 314) an OK response to send to the IVR system 22 (226 in Fig. 3). The call processing module 100 then proceeds to re-connect the user system with another element in the community 26, which may be one of the agent systems. To do so, the UAC 104 generates an Invite request (at 316) to send to the agent system (228 in Fig. 3). The UAC 104 processes (at 318) response messages from the agent system (230 and 232 in Fig. 3). Next, the UAC 104 generates an Invite request (at 320) to send to the user system (234 in Fig. 3). The UAC 104 also exchanges messages with the user system and the agent system (236, 238, and 240 in Fig. 3) to establish the call between the user system and the agent system (at 322).

Upon receipt of a Bye request from the agent system to terminate the call session, the proxy 102 generates (at 324) a Bye request to send to the user system. Upon receipt of an OK response from the user system, the proxy 102 generates an OK response to the agent system to acknowledge the Bye request.

A system that combines several logical entities, including a client, server, and proxy, is used for processing calls and directing the calls to appropriate ones of plural destinations. Such destinations may be part of a predefined community, such as a call center. The community may be associated with a single or a relatively small number of identifiers, such as telephone numbers. When a caller from outside the community communicates a call request containing one of the identifiers associated with the community, the call processing system responds initially as if it was the intended destination. The call processing system then proceeds to gather data about the caller

and to identify an appropriate one of the destinations within the community that should be connected to the user system. Once a connection is established, a media path provided directly between the user system and the appropriate one of the destinations within the community is established. By combining tasks performed by various logical entities for call processing, flexibility may be enhanced. The combined system allows internal management (within the community) of how inbound calls are processed and which destinations are accessed internally in response to a given inbound call. Thus, a single or a relatively small number of identifiers may be presented to the outside world while internally, multiple parties (greater than the number of identifiers presented to the outside world) are present.

The various software modules, routines, or other layers discussed herein may be executed on control units, such as one or more control units 118 shown in Fig. 2. Each control unit may include a microprocessor, a microcontroller, a processor card (including one or more microprocessors or microcontrollers), or other control or computing devices. The control unit may be coupled to one or more storage units, which may include one or more machine-readable storage media for storing data and instructions. As used here, a "controller" may refer to software, hardware, or a combination of both.

The storage media may include different forms of memory including semiconductor memory devices such as dynamic or static random access memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs) and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as compact discs (CDs) or digital video discs (DVDs). Instructions that make up the various software routines, modules, or other layers may be stored in respective storage units. The instructions when executed by a respective control unit cause the corresponding node or element to perform programmed acts.

The instructions of the software routines or modules may be loaded or transported into the node or element in one of many different ways. For example, code segments including instructions stored on floppy discs, CD or DVD media, a hard disk, or transported through a network interface card, modem, or other interface device may be loaded into the system and executed as corresponding software routines or modules. In the loading or transport process, data signals that are

embodied as carrier waves (transmitted over telephone lines, network lines, wireless links, cables, and the like) may communicate the code segments, including instructions, to the network node or element. Such carrier waves may be in the form of electrical, optical, acoustical, electromagnetic, or other types of signals.

- 5 While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of the invention.

1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
2656
2657
2658
2659
2660
2661
2662
2663
2664
2665
2666
2667
2668
2669
2670
2671
2672
2673
2674
2675
2676
2677
2678
2679
2680
2681
2682
2683
2684
2685
2686
2687
2688
2689
2690
2691
2692
2693
2694
2695
2696
2697
2698
2699
2700
2701
2702
2703
2704
2705
2706
2707
2708
2709
2710
2711
2712
2713
2714
2715
2716
2717
2718
2719
2720
2721
2722
2723
2724
2725
2726
2727
2728
2729
2730
2731
2732
2733
2734
2735
2736
2737
2738
2739
2740
2741
2742
2743
2744
2745
2746
2747
2748
2749
2750
2751
2752
2753
2754
2755
2756
2757
2758
2759
2760
2761
2762
2763
2764
2765
2766
2767
2768
2769
2770
2771
2772
2773
2774
2775
2776
2777
2778
2779
2780
2781
2782
2783
2784
2785
2786
2787
2788
2789
2790
2791
2792
2793
2794
2795
2796
2797
2798
2799
2800
2801
2802
2803
2804
2805
2806
2807
2808
2809
2810
2811
2812
2813
2814
2815
2816
2817
2818
2819
2820
2821
2822
2823
2824
2825
2826
2827
2828
2829
2830
2831
2832
2833
2834
2835
2836
2837
2838
2839
2840
2841
2842
2843
2844
2845
2846
2847
2848
2849
2850
2851
2852
2853
2854
2855
2856
2857
2858
2859
2860
2861
2862
2863
2864
2865
2866
2867
2868
2869
2870
2871
2872
2873
2874
2875
2876
2877
2878
2879
2880
2881
2882
2883
2884
2885
2886
2887
2888
2889
2890
2891
2892
2893
2894
2895
2896
2897
2898
2899
2900
2901
2902
2903
2904
2905
2906
2907
2908
2909
2910
2911
2912
2913
2914
2915
2916
2917
2918
2919
2920
2921
2922
2923
2924
2925
2926
2927
2928
2929
2930
2931
2932
2933
2934
2935
2936
2937
2938
2939
2940
2941
2942
2943
2944
2945
2946
2947
2948
2949
2950
2951
2952
2953
2954
2955
2956
2957
2958
2959
2960
2961
2962
2963
2964
2965
2966
2967
2968
2969
2970
2971
2972
2973
2974
2975
2976
2977
2978
2979
2980
2981
2982
2983
2984
2985
2986
2987
2988
2989
2990
2991
2992
2993
2994
2995
2996
2997
2998
2999
3000
3001
3002
3003
3004
3005
3006
3007
3008
3009
3010
3011
3012
3013
3014
3015
3016
3017
3018
3019
3020
3021
3022
3

What is claimed is:

- 1 1. A method of providing call processing in a communications system
2 having a packet-based network, comprising:
3 receiving, in a system, a first call request from a first device;
4 processing, in the system, the first call request and sending a response
5 to the first call request to indicate an attempt to establish a call session;
6 identifying one of plural destination devices to contact in response to
7 the call request; and
8 sending a second call request to the one destination device.
- 1 2. The method of claim 1, further comprising establishing a media path
2 between the one destination device and the first device.
- 1 3. The method of claim 1, further comprising receiving a response to the
2 second call request and processing the response without forwarding the response to
3 the first device.
- 1 4. The method of claim 1, wherein sending the response includes sending
2 a ringing response.
- 1 5. The method claim 4, further comprising receiving a ringing response
2 from the one destination device without forwarding a ringing response to the first
3 device.
- 1 6. The method of claim 1, wherein receiving the first call request includes
2 receiving a Session Initiation Protocol Invite request.
- 1 7. The method of claim 6, wherein sending the second call request
2 includes sending a Session Initiation Protocol Invite request.
- 1 8. The method of claim 1, wherein sending the response is performed by
2 a server task.

1 9. The method of claim 8, wherein sending the second call request is
2 performed by a client task.

1 10. The method of claim 9, further comprising:
2 receiving a success indication; and
3 forwarding the success indication, by a proxy, to the first device.

1 11. The method of claim 10, wherein receiving the success indication
2 includes receiving a Session Initiation Protocol OK response.

1 12. The method of claim 1, further comprising:
2 establishing a first call between the first device and the one destination
3 device;
4 identifying another one of the plural destination devices to contact; and
5 sending a first indication to the other one destination device to
6 establish a second call between the first device and the other one destination device.

1 13. The method of claim 12, further comprising sending a second
2 indication to the first device to establish the second call.

1 14. The method of claim 13, wherein sending the first indication includes
2 sending a third call request.

1 15. The method of claim 14, wherein sending the second indication
2 includes sending a fourth call request.

1 16. The method of claim 15, wherein sending the third call request and
2 sending the fourth call request comprise sending Session Initiation Protocol Invite
3 requests.

1 17. A system comprising:
2 an interface to a packet-based network; and
3 a controller adapted to receive a call request from an originating device
4 and to establish a first call between the originating device and a first device to receive
5 input data, the controller adapted to establish a second call between the originating
6 device and a second device based on the received input data.

1 18. The system of claim 17, wherein the first and second calls are part of
2 one call session.

1 19. The system of claim 17, wherein the controller causes establishment of
2 a media path between the originating device and the first device, the first device
3 comprising an integrated voice response system.

1 20. The system of claim 17, wherein the controller comprises a client, a
2 server, and a proxy.

1 21. The system of claim 20, wherein the controller comprises a Session
2 Initiation Protocol client, a Session Initiation Protocol server, and a Session Initiation
3 Protocol proxy.

1 22. An article comprising one or more storage media containing
2 instructions that when executed cause a system to:
3 process a first call request from a first device in a server mode;
4 in response to the first call request, send a second call request to a
5 second device in a client mode; and
6 process at least one message from one of the first and second devices
7 in a proxy mode.

1 23. The article of claim 22, wherein the instructions when executed cause
2 the system to send a response to the first device in the server mode to indicate
3 processing of the first call request.

1 24. The article of claim 23, wherein the instructions when executed cause
2 the system to receive a success indication responding to the second call request.

1 25. The article of claim 24, wherein the instructions when executed cause
2 the system to process the success indication in the proxy mode.

1 26. The article of claim 25, wherein the instructions when executed cause
2 the system to forward a success indication to the first device.

1 27. A data signal embodied in a carrier wave and containing instructions
2 that when executed cause a system to:
3 exchange control signaling with a first device to establish a first call
4 between an originating device and the first device;
5 receive input data from the originating device during the first call; and
6 exchange control signaling with one of plural destination devices based
7 on the input data to establish a second call between the originating device and the one
8 destination device.

1 28. The data signal of claim 27, wherein the instructions when executed
2 cause the system to exchange control signaling with the first device in client mode.

1 29. The data signal of claim 28, wherein the instructions when executed
2 cause the system to receive a call request from the originating device in server mode.

1 30. The data signal of claim 29, wherein the instructions when executed
2 cause the system to exchange further control signaling with the first device and the
3 one destination device in proxy mode.

1 31. A system capable of participating in call sessions over a packet-based
2 network, comprising:
3 a first module adapted to process a first call request from a first device
4 in a server mode;
5 a second module adapted to send a second call request to a second
6 device in a client mode in response to the first call request; and
7 a third module adapted to process at least one message from one of the
8 first and second devices in a proxy mode.

1 32. A system comprising:
2 an interface to a packet-based network to receive a call request
3 containing a callee identifier; and
4 a controller adapted to identify one device from a group of devices
5 coupled to the packet-based network based on the callee identifier and further
6 information, the controller adapted to further establish a call with the identified one
7 device.

1 33. The system of claim 32, wherein the further information comprises
2 user input.

1 34. The system of claim 33, wherein the user input is received from an
2 integrated voice response device.

1 35. The system of claim 32, wherein the controller is capable of processing
2 Session Initiation Protocol messages.

1 36. The system of claim 32, wherein the group of devices are identifiable
2 with the callee identifier, the controller performing one-to-many translation when
3 receiving an inbound call request containing the callee identifier.

ABSTRACT OF THE DISCLOSURE

A communication system includes a packet-based data network coupled to various network entities. The communications system includes a community that has a call processing system and various other devices, such as an integrated voice response (IVR) system and plural agent systems. The call processing system includes a combination of logical entities that perform call processing tasks. As an example, the logical entities may include a Session Initiation Protocol (SIP) proxy, a SIP client, and a SIP server. In response to a call request from outside the community, the call processing system, under control of the server, sends back responses to the originating system. The call processing system also establishes a call with a network element inside the community, such as the IVR system. The IVR system is capable of receiving input data from the originating system. Based on the received input data, the call processing system can reconnect or forward the call to one of the agent systems.

1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200

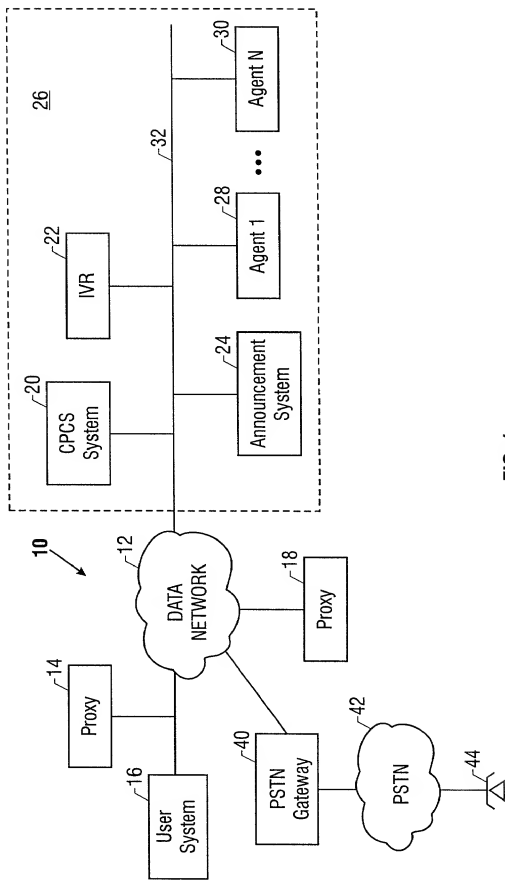


FIG. 1

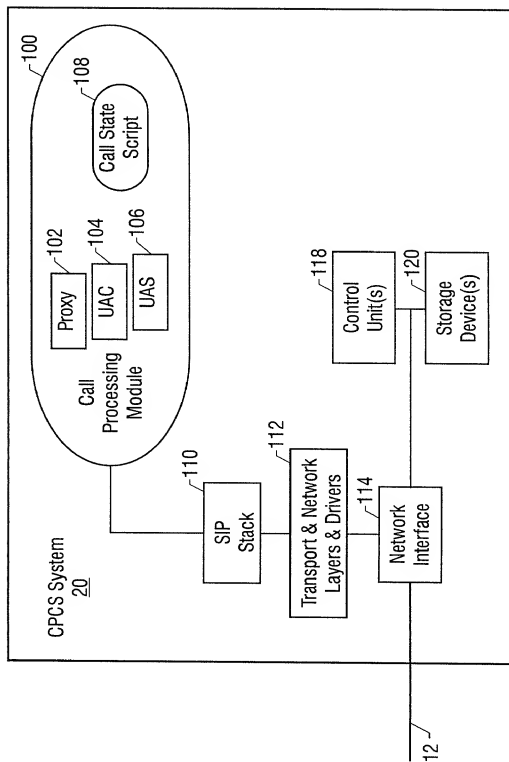


FIG. 2

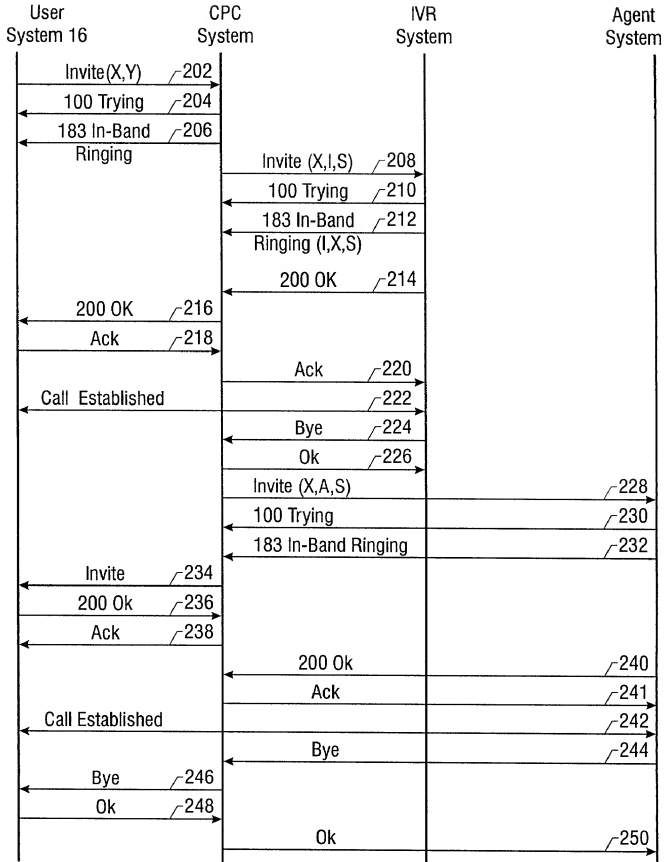


FIG. 3

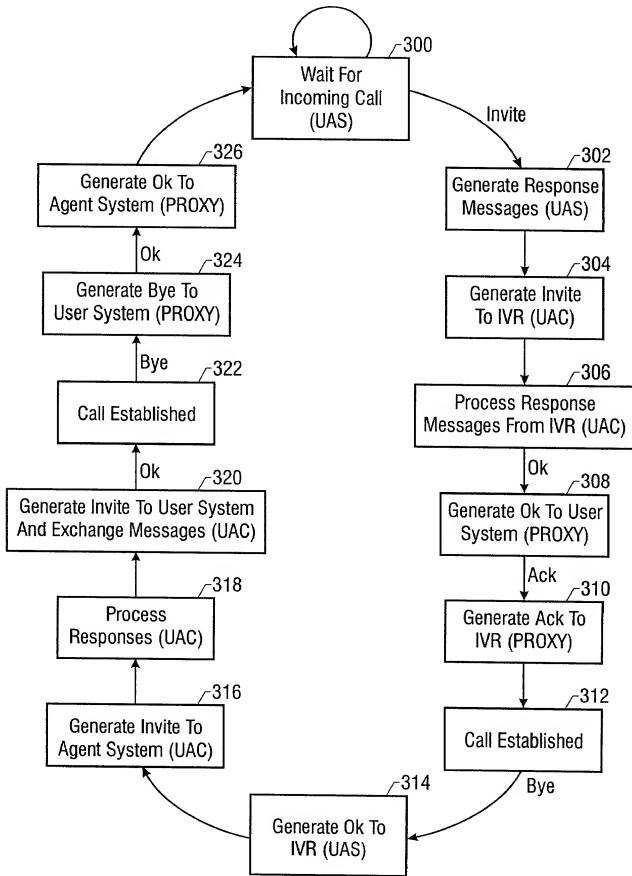


FIG. 4

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR CALL PROCESSING

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)


I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Number)	Filing Date	(Status-patented, pending, abandoned)
----------------------	-------------	---------------------------------------

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, and Dan C. Hu, Reg. No. 40,025; my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; Howard R. Greenberg, Reg. No. 26,171; W. Glen Johnson, Reg. No. 39,525; Randall Mishler, Reg. No. 42,006; Kevin L. Smith, Reg. No. 38,620; Vernon E. Williams, Reg. No. 38,713; my patent attorneys, of Nortel Networks Limited; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: ANDREW J. PROKOP	
Inventor's Signature: 	Date: 6.6.00
Residence: 708 GOODRICH AVE., ST. PAUL, MN 55105	Citizenship: U.S.A.
Post Office Address: 708 GOODRICH AVE., ST. PAUL, MN 55105	